



Kährs®



LUXURY TILES

MATCHING BEAUTY WITH PERFORMANCE

With a strong passion for design and a long history of producing high quality floors, Kährs has taken Luxury Tiles to a new level of combining stunning looks with great performance.

Our Luxury Tiles includes a wide range of modern, high-quality floors for all types of spaces, providing excellent durability even in areas with very high traffic. They are suitable for hotels, offices, restaurants, stores, private homes and hospitals alike.

These floors combine the beautiful and natural appearance of wood and stone with all the benefits regarding resilience and maintenance of modern flooring technology. They are produced with focus on promoting a good indoor air quality; all our floors are phthalate-free and we also offer a PVC-free range.

Floors beyond expectations. Endless possibilities.



WHY KÄHRS LUXURY TILES



COMPLETE OFFERING

Complete range of Luxury Tiles for all application areas and based on a variety of installation methods. They range from the easy-to-install Click collection through to versatile Dry Back and flexible Loose Lay.



WIDE RANGE OF NATURAL LOOKS

All of our Luxury Tiles floors are based on wood or stone designs in a variety of colours and looks. The new range includes longer planks with an even more natural design and floor feeling.



BETTER AIR QUALITY

All our floors are designed to promote a good indoor air quality and are phthalate free. We also offer a PVC free collection – the Dry Back Xpression collection. The Luxury Tiles floors are certified according to a number of standards, including Floorscore, M1 and French A+.



EASY TO MAINTAIN

Made of a water proof material, the Luxury Tiles floors are durable and easy to clean, even in areas exposed to water and humidity. They are resistant to wear and scratches, as well as to chemical substances.



DESIGNED IN SWEDEN

Our Luxury Tiles are perfect examples of the strong Swedish design tradition, characterised by a timeless, yet contemporary elegance.



LOW LIFECYCLE COST

All Luxury Tiles are constructed to ensure excellent durability and a long life. The floors in the Click collection are based on a rigid core and feature strong 5G joints for outstanding stability, as well as a sound reducing backing system for reduced noise and increased comfort.



FAST & SAFE INSTALLATION

All our Luxury Tiles are easy to install and suitable for underfloor heating, which means that they won't crack or bend. No glue is needed for the Click collection, thanks to the click installation system. In our Dry back collection there are endless possibilities to create interesting cut outs or install herringbone patterns.



SUSTAINABILITY

Purchasing a Luxury Tiles floor means being eco-smart in a number of ways. These include durability; it's almost impossible to wear out a Luxury Tiles floor. This means a long life and making the best use of the planet's resources.

KÄHRS LUXURY TILES RANGES



KÄHRS LUXURY TILES CLICK

The Kährs Luxury Tiles Click collection has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology. Both these features also contribute to making these floors easy to install. Meanwhile, the IXPE sound reducing backing system effectively controls noise and make the floors comfortable to walk on.




KÄHRS LUXURY TILES DRY BACK

Our Dry back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to elegant herringbone and rustic, while the stone designs span from classic stone to concrete. There are three versions with 0.7 mm, 0.55 mm and 0.3mm wear layer thickness.



KÄHRS LUXURY TILES DRY BACK XPRESSION

The Dry Back Xpression floors have been specially developed with health in mind. The range includes PVC and plasticizer free luxury planks and tiles developed and designed to please the eye, as well as benefit the environment.

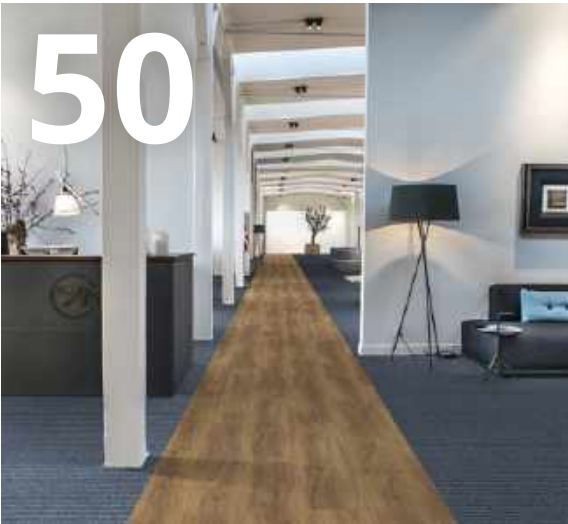

KÄHRS LUXURY TILES LOOSE LAY

The Kährs Luxury Tiles Loose Lay collection consists of a range of modular floors featuring wood and stone designs. They are easy and fast to install, featuring a non-slip reverse side requiring no adhesive. This makes them perfect for both permanent and temporary use, such as for fairs and shows. The floors are 5.0 millimeter thick, which makes them ideal for combining with textile without any difference in level.

REFERENCES

Kährs Luxury Tiles floors can be found in many contexts – ranging from private homes to retail, restaurants, offices, hospitals and schools – in locations from Stockholm to Tokyo.

Below, you will find a list of some the projects featuring our Luxury Tiles floors.

DRY BACK REFERENCES:

All Dressman stores in the Nordics
All Cubus stores in the Nordics
All Bik Bok stores in the Nordics
All Nordic Wellness gyms in the Nordics
Flying tiger of Copenhagen stores in Europe
Synsam stores, Sweden
Panduro hobby stores in Sweden
Tokyo Disneyland, Tokyo
Office Volvo VAK, Torslanda
Arena Olympia, Helsingborg
Malmö Arena Lounge 4, Malmö
Gym Friskis & Sveltis, Höganäs
Office Aichi Toyota/AT Group, Nagoya city
The bank of Tokyo-Mitsubishi UFJ, Nagoya city
Restaurant Kavalleristen, Helsingborg
Restaurant Bryggan, Höganäshamn
Restaurang Condeco, Malmö
Hospital Kobe Hakuai, Kobe city

DRY BACK XPRESSION REFERENCES:

Store Intersport, Kockola
Salpausselkä school, Lathi

LOOSE LAY REFERENCES:

Volvo PVH, Torslanda
Cerner properties, combined with textile tiles, Borås
Dental surgery, Helsingborg
Hotel Arena, Malmö
Hotel Gekås, combined with textile tiles, Ullared
Hotel S7, combined with textile tiles, Västerås

CLICK REFERENCES:

Property developer Aranäs, Kungälv
Housing developer Skebo, Skellefteå
Housing developer Mannberg fastigheter, Skellefteå
Housing developer Akademiska hus, Piteå, Luleå
Office Ljusexperterna, Helsingborg
School IT-Gymnasiet, Helsingborg
Stores Hemmakväll, Malmö, Kristianstad, Frölunda, Halmstad
Restaurant Torstens Restaurang, Båstad
Restaurants Harrys, Kalmar, Kungälv, Sälén, Falun, Linköping
Mjölby firestation, Mjölby

Visit kahrsflooring.com to discover our case studies.





Ceramic coating
Wear resistant layer
Decorative layer
SPC substrate
IXPE Sound reducing backing

KÄHRS LUXURY TILES CLICK

The Kährs Luxury Tiles Click collection has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs.

Maximum durability and stability is achieved through the rigid core and the unique 5 G locking technology, enabling easy installation by clicking the tiles together.

The Click floors are made from virgin vinyl with a rigid core. All floors in the collection, apart from those featuring Herringbone patterns, have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water.

They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

- C6** Thickness 6 mm, Wear layer 0.55 mm
Wood design 218 x 1210 and stone designs 300 x 600 mm
- C5** Thickness 5 mm, Wear layer 0.3 mm
Wood design 172 x 1210 and stone designs 300 x 600 mm
- CX** Thickness 6 mm, Wear layer 0.55 mm
Wood design 220 x 1828 and stone designs 457 x 914 mm



Sound reduction



5G click



Rigid Core



Free from phthalate



Water proof material



Underfloor heating



Ceramic coating



Synchron embossing



SAXON



TIVEDEN

CLW | **CLICK**
WOOD DESIGN *TRADITIONAL*



C6 C5

OULANKA



C6 C5 HB

TAIGA



C6

SHERWOOD



C6 C5 HB

REDWOOD



C6 C5 HB

SAREK

ELEGANT



C6 C5 HB

WHINFELL



C6

TIVEDEN



C6 C5

WENTWOOD



C6 HB

TONGASS



C6 HB

CALDER

WOOD: C6 218 x 1210 x 6 mm C5 172 x 1210 x 5 mm HB 120 x 720 x 5 mm. For herringbone installation.

CLW | **CLICK**
WOOD DESIGN *RUSTIC*



C6

DURMITOR



C6

LACANDON



C6 C5

KANNUR



C6 C5 HB

SAXON



C6 C5 HB

BELLUNO



C6

KOMI



C6

DAINTREE



C6

AMAZON



C6 C5

NIAGARA

WOOD: C6 218 x 1210 x 6 mm C5 172 x 1210 x 5 mm HB 120 x 720 x 5 mm. For herringbone installation.

CLW | **CLICK**
WOOD DESIGN *MONOCHROME*



C6 C5

YUKON



C6

RIVA



C6 C5

SCHWARZWALD



C6

LUCANIA



C6 C5

MAKALU

CLS | **CLICK**
STONE DESIGN



C6 C5

MATTERHORN



C6 CX

GROSSGLOCKNER



C6

KEBNEKAISE



C6 CX

KILIMANJARO



C6 C5

STEELE



C6 C5

SCHWARZHORN

WOOD: C6 218 x 1210 x 6 mm C5 172 x 1210 x 5 mm

STONE: C6 300 x 600 x 6 mm C5 300 x 600 x 5 mm CX 457 x 914 x 6 mm

CLW | **CLICK**
WOOD DESIGN *IMPRESSION*



DOVECOT



FOXALL



SPREEWALD



SAHAM



LAPONIA



KELHAM



ODENWALD



BALMORAL

WOOD: 220 x 1828 x 6 mm Synchron embossing

CLS | **CLICK**
STONE DESIGN *IMPRESSION*



AMARO




ATHOS



OLYMPUS



ANETO

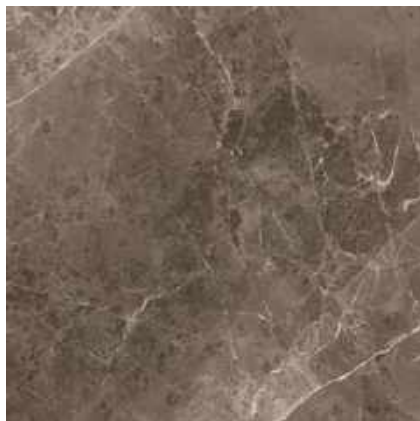


ULTAR



TALUNG

STONE:  457 x 914 x 6 mm

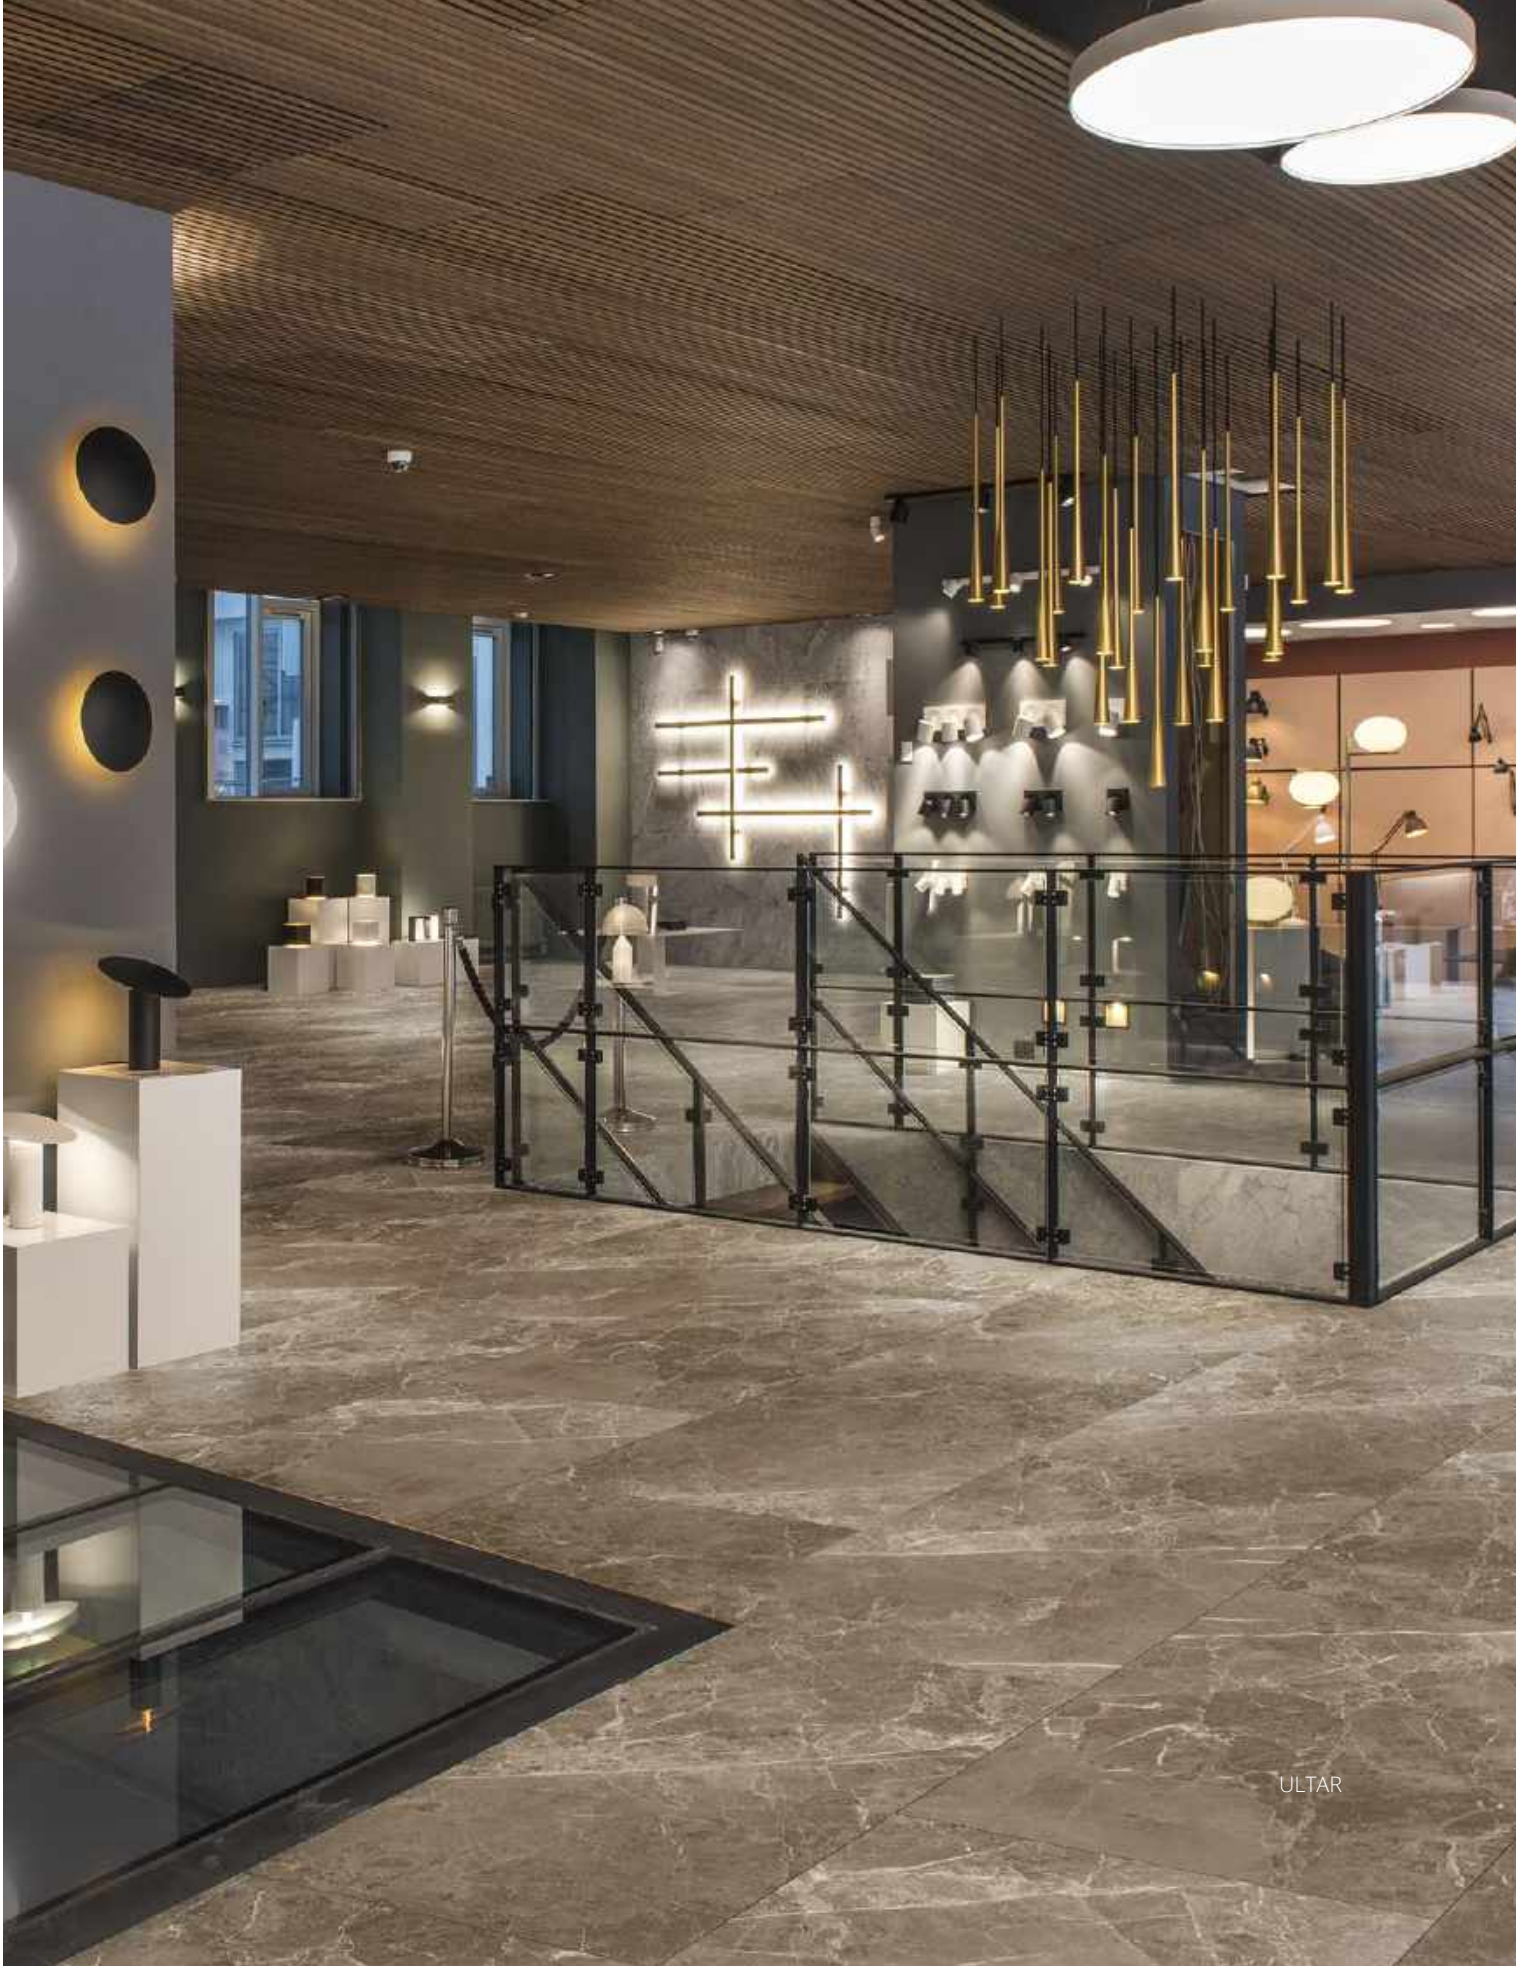

ULTAR

CHW | **CLICK** HERRINGBONE


The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – A and B boards – specially designed for herringbone patterns.

They are installed using high quality Click system to ensure stability- Woodloc 5Gi.

Please note that these floors comes without sound reducing backing, for suitable underlayer material see page 39.



Thicknes 5 mm, Wear layer 0.55 mm
Wood design 120 x 720 mm
For underlayer material for Herringbone

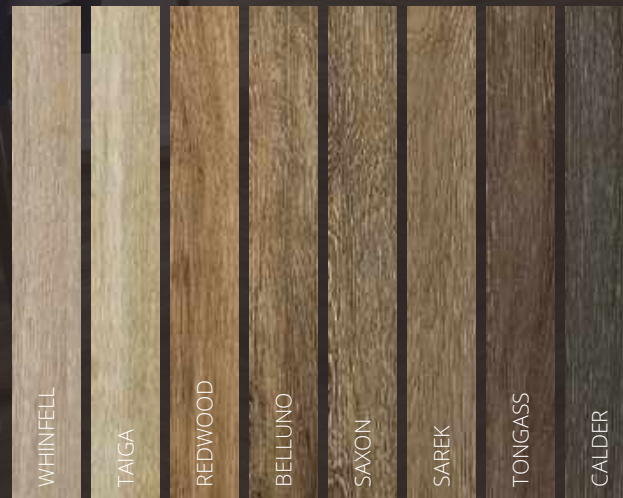



Ceramic Coating
Wear resistant layer
Decorative layer
Center layer
Base backing

KÄHRS LUXURY TILES DRY BACK

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to elegant herringbone and rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns.

The Dry Back floors are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

D7 Thickness 2.5 mm, Wear layer 0.7 mm
Wood design 229 x 1219 and stone designs 305 x 610 and 457 x 457 mm

D5 Thickness 2.5 mm, Wear layer 0.55 mm
Wood design 229 x 1219 and stone designs 305 x 610 and 457 x 457 mm

D3 Thickness 2.5 mm, Wear layer 0.3 mm
Wood design 229 x 1219 and stone designs 305 x 610 and 457 x 457 mm

HB Thickness 2.5 mm, Wear layer 0.7 mm
Wood design 102 x 457



Free from
phthalate



Water
proof
material



Underfloor
heating



Ceramic
coating

DBW

DRY BACK

WOOD DESIGN *TRADITIONAL*



D5 D3

TRIGLAV



D7 D5 D3

OULANKA



D7 D5 D3

TAIGA



D7 D5 D3

SAREK



D7 D5 D3

SHERWOOD



D7 D5 D3 HB

REDWOOD



D5 D3

CALEDONIAN



D5 D3

BURNHAM



D5 D3 HB

VALDIVIAN

WOOD: **D7** 229 x 1219 x 2.5 mm **D5** 229 x 1219 x 2.5 mm **D3** 229 x 1219 x 2.5 mm
HB 102 x 457 x 2.5 mm. For herringbone installation.

DBW

DRY BACK

WOOD DESIGN *MONOCHROME*



D7 D5 D3

YUKON



D7 D5 D3

RIVA



D5 D3

STANTON



D5 D3

PLITVICE



D5 D3

HUMBOLDT



D7 D5 D3 HB

SCHWARZWALD

WOOD: D7 229 x 1219 x 2.5 mm D5 229 x 1219 x 2.5 mm D3 229 x 1219 x 2.5 mm
HB 102 x 457 x 2.5 mm. For herringbone installation.

DBW

DRY BACK

WOOD DESIGN *ELEGANT*



D7 D5 D3 HB

WHINFELL



D5 D3 HB

TIVEDEN



D7 D5 D3

WENTWOOD



D5 D3 HB

TONGASS



D5 D3 HB

CALDER

DBW

DRY BACK

WOOD DESIGN *RUSTIC*



D5 D3

SNOWDONIA



D5 D3

CORMORANT



D5 D3

WAIPOUA



D7 D5 D3

KANNUR



D5 D3

DURMITOR

WOOD: D7 229 x 1219 x 2.5 mm D5 229 x 1219 x 2.5 mm D3 229 x 1219 x 2.5 mm
HB 102 x 457 x 2.5 mm.



D7 D5 D3

BELLUNO



D5 D3 HB

KOMI



D5 D3

GORBEA



D7 D5 D3

SAXON



D7 D5 D3

NIAGARA



D5 D3

DAINTREE



D5 D3

AMAZON


WOOD: D7 229 x 1219 x 2.5 mm D5 229 x 1219 x 2.5 mm D3 229 x 1219 x 2.5 mm
HB 102 x 457 x 2.5 mm.



ACCESSORIES FOR DRY BACK

When you are looking to create a contrast or highlight each individual plank or create nautical themes, stripes is the way to go. Below you will find a selection of our stripes.

The dimensions of all stripes are 5 x 914 x 2 mm.



MAPLE S 6060



GREY S 3515




SILVER S C1



RED S 6401



MAHOGNY S 3501



ANTRACITE S C7




BLACK S 3504



STAIR PROFILE STEEL, DRY BACK


1M, 7075510LTSS
2M, 7075520LTSS



ACCESSORIES FOR CLICK AND CLICK HERRINGBONE




BEVEL COVER STRIP STEEL



1M, 7075110LTSS
2M, 7075120LTSS




T-MOULDING STEEL



1M, 7075310LTSS
2M, 7075320LTSS




END MOULDING STEEL



1M, 7075210LTSS
2M, 7075220LTSS



STAIR NOSE STEEL



1M, 7075410LTSS
2M, 7075420LTSS



UNDERLAYER MATERIAL FOR CLICK HERRINGBONE



KÄHRS LT UNDERLAYER FOAM 1 MM

1 M X 15 M, 710158



KÄHRS TUPLEX LT UNDERLAYMENT

1,1 X 15 M, 710132
1,1 X 30 M, 710133

DBS | **DRY BACK**
STONE DESIGN



D5 D3

LHOTSE



D7 D5 D3

LUCANIA



D7 D5 D3

GROSSGLOCKNER




D7 D5 D3

KILIMANJARO



D5 D3

BROAD PEAK

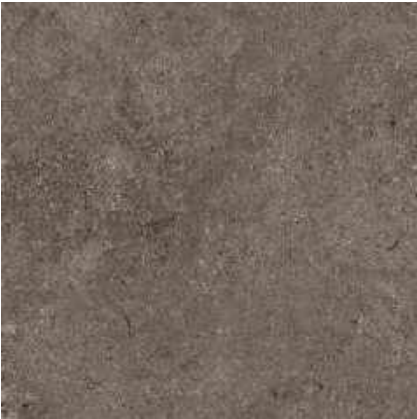

D5 D3

DOM

DBS | **DRY BACK**
STONE DESIGN *BRILLIANT STONE*



D5 D3

MONT BLANC



D5 D3

DENALI



D7 D5 D3

KEBNEKAISE



D7 D5 D3

MATTERHORN



D7 D5 D3

STEELE

STONE: D7 457 x 457 x 2.5 mm D5 457 x 457 x 2.5 mm D3 457 x 457 x 2.5 mm

CLASSIC STONE



D7 D5 D3

MAKALU



D7 D5 D3

SCHWARZHORN

STONE: D7 305 x 610 x 2.5 mm D5 305 x 610 x 2.5 mm D3 305 x 610 x 2.5 mm



SCHWARZHORN



High Performance Surface Treatment :
Wear Resistant Ionomer Layer :
Decorative Layer :
Enomer Core :

KÄHRS LUXURY TILES

DRY BACK XPRESSION


The Kährs Luxury Tiles Dry Back Expression floors have been specially developed with health in mind. The range includes PVC and plasticizer free luxury planks and tiles developed and designed to please the eye, as well as benefit the environment.

The floors are made from a unique Enomer® material free from PVC, plasticizers, phthalates and halogens. They are anti-static with excellent stain and bacteria resistance. They also have extremely low VOC's – which means that they promote clean and healthy indoor air.

DX Thickness 2 mm, Wear layer XX mm
Wood design 178 x 1219 and stone designs 500 x 500 mm

- 

Free from phthalater
- 

Water proof material
- 

Underfloor heating
- 

PVC Free
- 

Enomer

WARM GREY

DBX | **DRY BACK XPRESSION**
WOOD DESIGN



ALMOND



DUNE



NATURAL



HAZEL



GOLDEN OAK



CANADIAN MAPLE



AMERICAN CHERRY



ROYAL QUINCE



FRENCH WALNUT



SMOKED

WOOD: 178 x 1219 x 2 mm



CHESTNUT



CHARCOAL



WARM GREY



COOL GREY



DARK GREY

DBX | **DRY BACK XPRESSION**
STONE DESIGN



LIGHT



SAND



SLATE




FADED



MARbled

WOOD: 178 x 1219 x 2 mm STONE: 500 x 500 x 2 mm

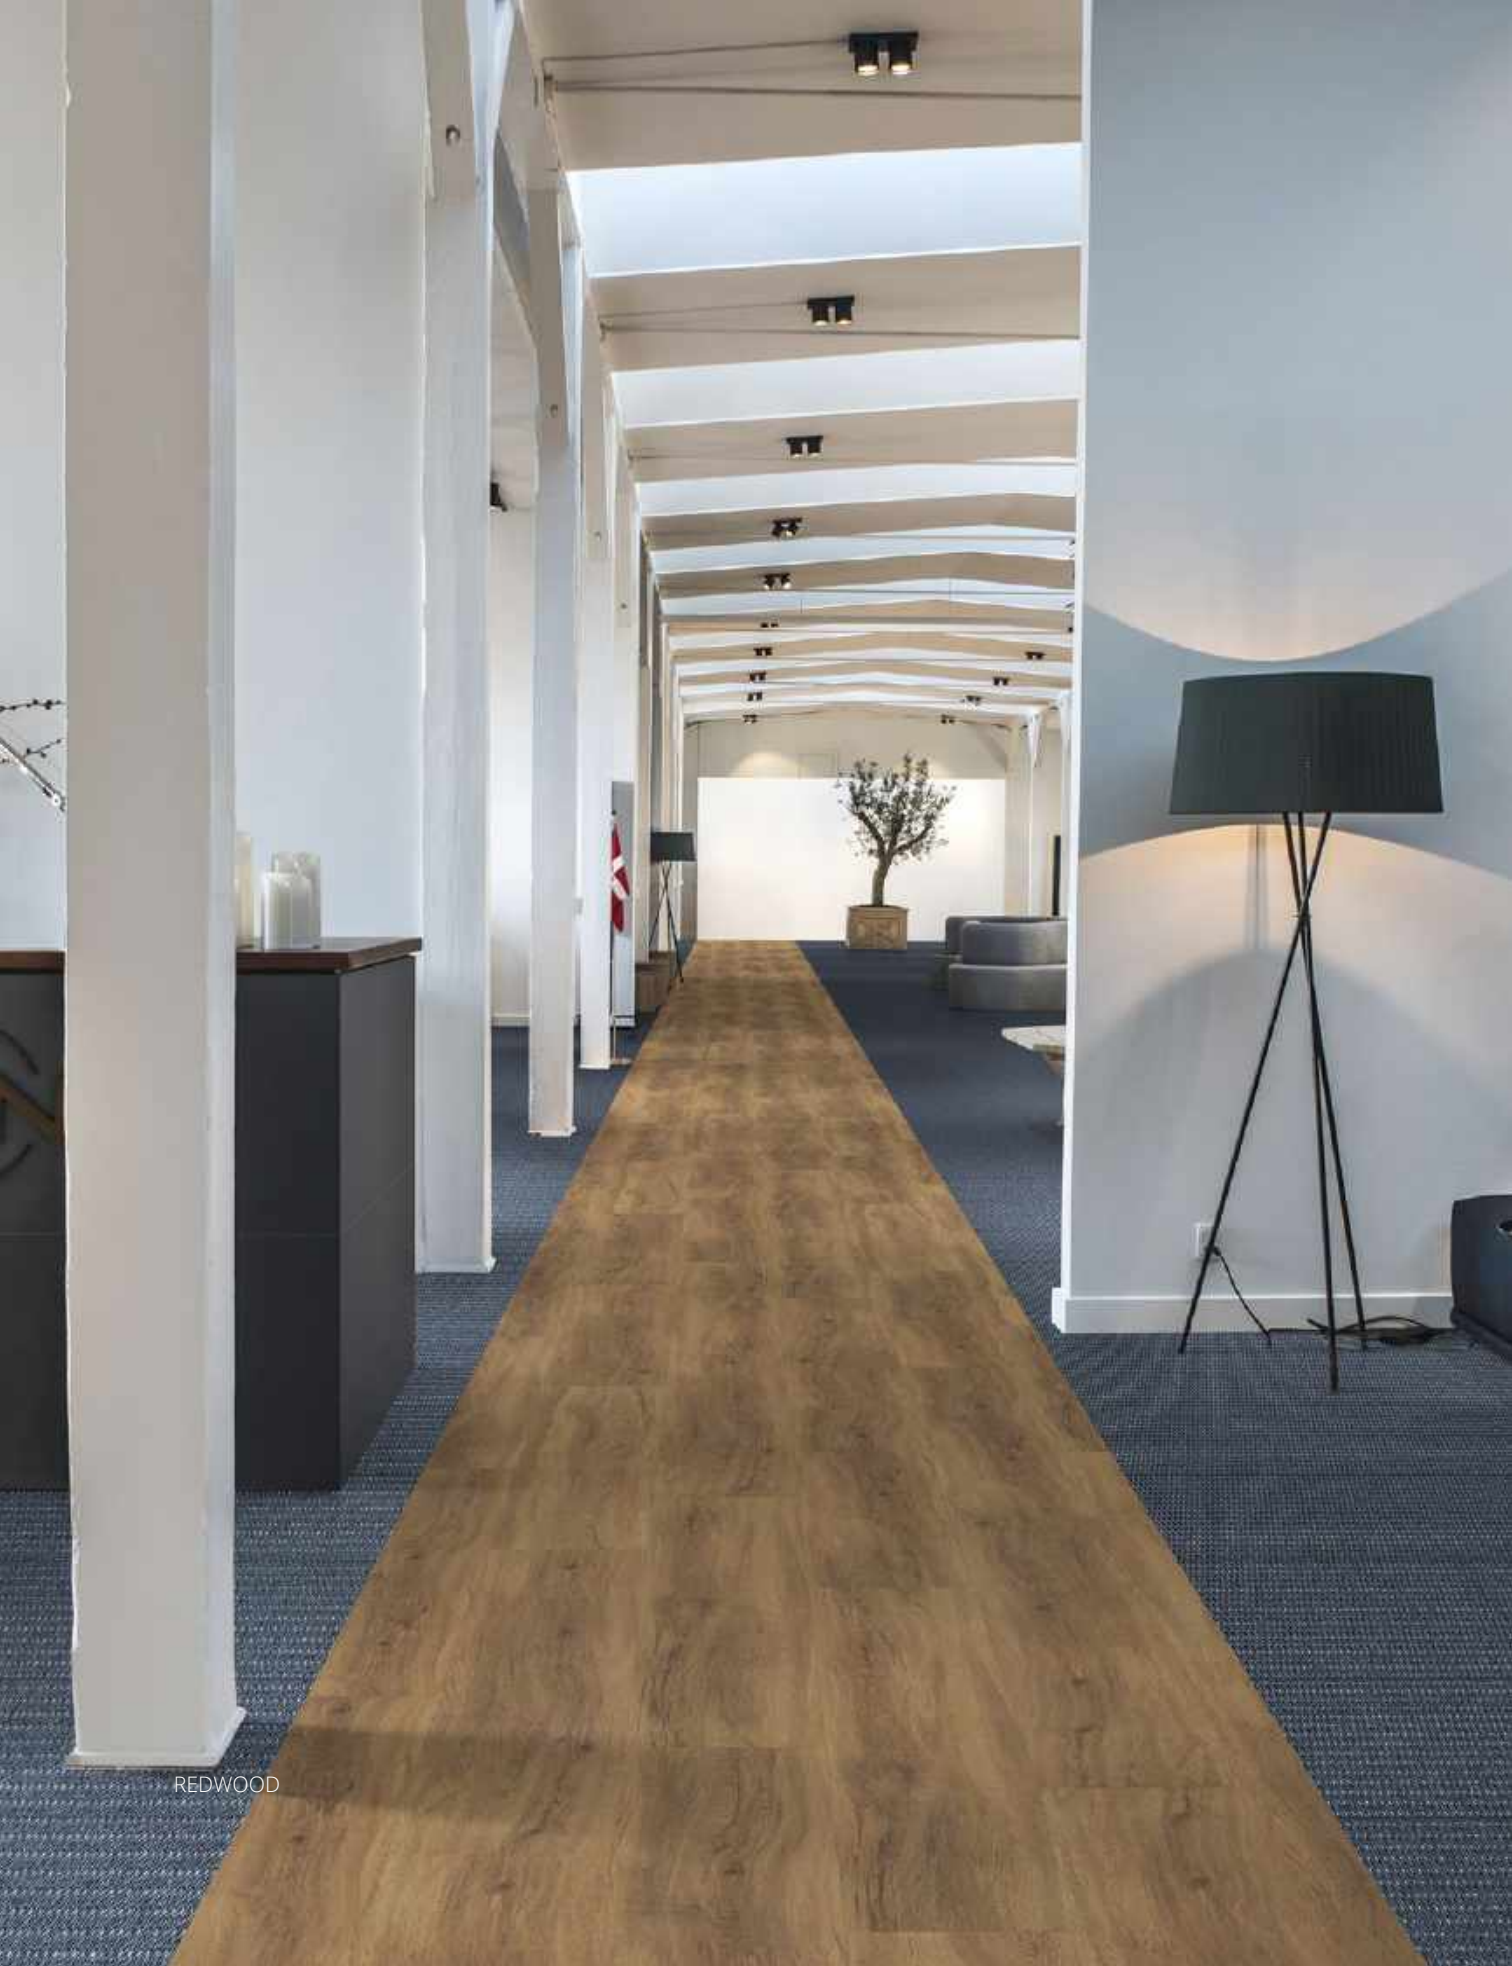

KÄHRS LUXURY TILES **LOOSE LAY**

The Kährs Luxury Tiles Loose Lay collection consists of a range of modular floors featuring wood and stone designs. They are easy and fast to install, featuring a non-slip reverse side requiring no adhesive. This makes them perfect for both permanent and temporary use, such as for fairs and shows.

The floors are 5.0 millimeter thick, which makes them ideal for combining with textile tiles without any difference in level. They are made from virgin vinyl and the surface is treated with a ceramic coating for strength and durability. Like all other Kährs Luxury Tiles floors they are phthalate free.



Thicknes 5 mm, Wear layer 0.5 mm
Wood design 229 x 1219 and stone designs 500 x 500 mm



Free from
phthalater



Water
proof
material



Underfloor
heating



Ceramic
coating

REDWOOD

LLW | **LOOSE LAY**
WOOD DESIGN



SNOWDONIA



WHINFELL



CORMORANT



SAREK



TIVEDEN



SHERWOOD



REDWOOD



BURNHAM



GORBEA



SCHWARZWALD

WOOD: 229 x 1219 x 5 mm



SCHWARZWALD/TIVEDEN/SNOWDON


LLS | **LOOSE LAY**
STONE DESIGN



PAMIR



MATTERHORN

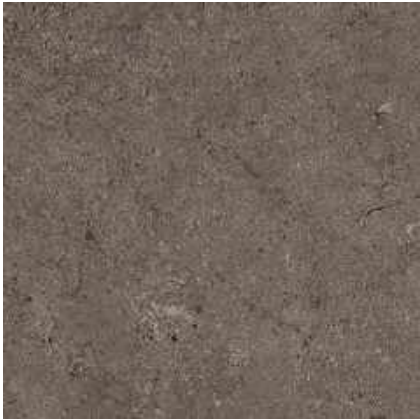

KILIMANJARO



DENALI



SCHWARZHORN



STEELE

STONE:  500 x 500 x 5 mm

PRODUCT DATA SHEET

CLICK WOOD AND STONE DESIGN

PRODUCT		C6/CX	C5
Click LVT Rigid Core SPC+ IXPE	EN ISO 10582	Luxury Vinyl Tile	Luxury Vinyl Tile
Joint		Click 5G	Click 5G
Application	EN ISO 10874	23/33/42	23/31

SPECIFICATION			
Thickness	EN ISO 24337	6.0 mm	5.0 mm
Weight	EN ISO 24342	9.76 kg/m²	7.87 kg/m²
Wear layer	EN ISO 24346	0.55 mm	0.30 mm

PRODUCT PROPERTIES		
PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore, A+
Fire resistance	EN 13501-1	Bfl-s1
Residual indentation	EN ISO 24343-1 (2.5 H)	< 0.2 mm (*with underlayment)
Dimensional stability	EN ISO 23999 (80 °C/6 H)	< 0.1 %
Colour fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893 DIN 51130	DS (> 0.3) R10
Electrical propensity	EN 1815	< 2 kV (antistatic)
Wear and scratch resistance	EN 16094	Pass with good results
Chemical resistance	EN ISO 26987	Pass with good results
Effect of castor chair	EN 425	Suitable
Underfloor heating		Ok (max +27 °C / 80 F)
Bacterial growth		Does not act as substrate
Impact sound reduction		20 ΔL _w (dB) (IXPE underlayment)

Click Wood

- 218 x 1210 x 6 mm, 2.112 m²/box.
- 172 x 1210 x 5 mm, 2.08 m²/box.
- 220 x 1828 x 6 mm, 1.61 m²/box.

Click Stone

- 300 x 600 x 6 mm, 1.8 m²/box.
- 300 x 600 x 5 mm, 1.8 m²/box.
- 457 x 914 x 6 mm, 2,51 m²/box

Warranty Europe

Residential 20 Year
Commercial 5 Year

Warranty Americas

Residential 20 Year
Commercial 5 Year Limited Warranty



To ensure correct colour, all floor samples are available on request at www.kahr flooring.com.
Please visit www.kahr flooring.com.com for detailed information about installation and maintenance.

PRODUCT DATA SHEET

CLICK HERRINGBONE

PRODUCT		
Click LVT Rigid Core SPC	EN ISO 10582	Luxury Vinyl Tile
Joint		Click 5Gi
Application	EN ISO 10874	23/33/42

SPECIFICATION		
Thickness	EN ISO 24337	5.0 mm
Weight	EN ISO 24342	9.58 kg/m²
Wear layer	EN ISO 24346	0.55 mm

PRODUCT PROPERTIES		
PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore, A+
Fire resistance	EN 13501-1	Bfl-s1
Residual indentation	EN ISO 24343-1 (2.5 H)	< 0.1 mm (*with underlayment)
Dimensional stability	EN ISO 23999 (80°C/6 H)	< 0.1 %
Colour fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893 DIN 51130	DS (> 0.3) R10
Electrical propensity	EN 1815	< 2 kV (antistatic)
Wear and scratch resistance	EN 16094	Pass with good results
Chemical resistance	EN ISO 26987	Pass with good results
Effect of castor chair	EN 425	Suitable
Underfloor heating		Ok (max +27°C)
Bacterial growth		Does not act as substrate

Click Herringbone

120 x 720 x 5 mm, 1.4 m²/box.

Warranty Europe

Residential 20 Year
Commercial 5 Year

Warranty Americas










Residential 20 Year
Commercial 5 Year Limited Warranty






To ensure correct colour, all floor samples are available on request at www.kahr flooring.com.
Please visit www.kahr flooring.com.com for detailed information about installation and maintenance.

PRODUCT DATA SHEET











DRY BACK WOOD AND STONE DESIGN

PRODUCT		D7	D5	D3
Dry back	EN ISO 10582	Luxury Vinyl Tile		
Application	EN ISO 10874	23/34/43	23/33/42	23/31
<div><div></div><div></div><div></div></div>				

SPECIFICATION

Thickness		EN ISO 24337	2.5 mm	2.5 mm	2.5 mm
Weight		EN ISO 24342	4.2 kg/m²	4.2 kg/m²	4.2 kg/m²
Wear layer		EN ISO 24346	0.7 mm	0.55 mm	0.3 mm

PRODUCT PROPERTIES

PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore, A+
Fire resistance	 EN 13501-1	Bfl-s1
Residual indentation	 EN 433	≤ 0.05 mm
Dimensional stability	 EN 434	< 0.1 %
Colour fastness	 EN ISO 105-B02	≥ 6
Slip resistance	 EN 13893 DIN 51130	DS (> 0.3) R10
Electrical propensity	 EN 1815	< 2 kV (antistatic)
Wear resistance	 EN 660-2	< 2.0 mm³ (Class T)
Chemical resistance	 EN ISO 26987	Pass with good results
Effect of castor chair	 EN 425	Suitable
Underfloor heating		Ok (max +27°C)
Bacterial growth		Does not act as substrate

Dry Back Wood

- D7

229 x 1219 x 2.5 mm, 3.9 m²/box.
- D5

229 x 1219 x 2.5 mm, 3.9 m²/box.
- D3

229 x 1219 x 2.5 mm, 3.9 m²/box.
- HB

102 x 457 x 2.5 mm, 2.78 m²/box.

Dry Back Stone

- D7

305 x 610 x 2.5 mm, 2.58 m²/box.
457 x 457 x 2.5 mm, 5.01 m²/box.
- D5

305 x 610 x 2.5 mm, 2.58 m²/box.
457 x 457 x 2.5 mm, 5.01 m²/box.
- D3

305 x 610 x 2.5 mm, 2.58 m²/box.
457 x 457 x 2.5 mm, 5.01 m²/box.

Warranty Europe

- Residential 20 Year
- Commercial 5 Year

Warranty Americas




- Residential 20 Year
- Commercial 5 Year Limited Warranty



To ensure correct colour, all floor samples are available on request at www.kahr flooring.com.
Please visit www.kahr flooring.com for detailed information about installation and maintenance.

PRODUCT DATA SHEET











DRY BACK XPRESSION WOOD AND STONE DESIGN

PRODUCT		
Dry back	EN ISO 14565	Luxury Vinyl Tile
Application	EN ISO 10874	23/34/43
<div></div>		

SPECIFICATION

Thickness	 EN ISO 24346	2.0 mm
Weight	 EN ISO 23997	3.4 kg/m²

PRODUCT PROPERTIES

PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore, A+
Fire resistance	 EN 13501-1	Cfl-s1
Residual indentation	 EN ISO 24343-1 (2.5 H)	< 0.05 mm
Dimensional stability	 EN 434 (50 °C/6 H)	< 0.2 %
Colour fastness	 EN ISO 105-B02	≥ 6
Slip resistance	 EN 13893 DIN 51130	DS (> 0.3) R9
Electrical propensity	 EN 1815	< 2 kV (antistatic)
Wear resistance	 EN 660-2 ISO 5470-1	< 2.0 mm³ (Class T) 0.05 g/1000 cycles
Chemical resistance	 EN ISO 26987	Excellent
Effect of castor chair	 EN 425	Suitable
Underfloor heating		Ok (max +28°C)
Bacterial growth		Does not act as substrate

Dry Back Xpression Wood

DX

 178 x 1219 x 2 mm, 4.33 m²/box.

Dry Back Xpression Stone

DX

 500 x 500 x 2 mm, 2.5 m²/box.

Warranty Europe

- Residential 20 Year
- Commercial 5 Year

Warranty Americas

- Residential 20 Year
- Commercial 5 Year Limited Warranty



To ensure correct colour, all floor samples are available on request at www.kahr flooring.com.
Please visit www.kahr flooring.com for detailed information about installation and maintenance.

PRODUCT DATA SHEET




LOOSE LAY WOOD AND STONE DESIGN

PRODUCT











Loose Lay LVT	EN ISO 10582	Luxury Vinyl Tile
Application	EN ISO 10874	23/32




SPECIFICATION

Thickness	 EN ISO 24337	5.0 mm
Weight	 EN ISO 24342	9.7 kg/m²
Wear layer	 EN ISO 24346	0.5 mm


PRODUCT PROPERTIES

PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore, A+
Fire resistance	 EN 13501-1	Bfl-s1
Residual indentation	 EN 433	< 0.1 mm
Dimensional stability	 EN 434	≤ 0.15 %
Colour fastness	 EN ISO 105-B02	≥ 6
Slip resistance	 EN 13893 DIN 51130	DS (> 0.3) R10
Electrical propensity	 EN 1815	< 2 kV (antistatic)
Wear resistance	 EN 660-2	< 2.0 mm³ (Class T)
Chemical resistance	 EN ISO 26987	Pass with good results
Effect of castor chair	 EN 425	Suitable
Underfloor heating		Ok (max +27°C)
Bacterial growth		Does not act as substrate

Loose Lay Wood

 229 x 1219 x 5 mm, 1.95 m²/box.

Loose Lay Stone

 500 x 500 x 5 mm, 2.5 m²/box.

Warranty Europe

Residential 20 Year
Commercial 5 Year

Warranty Americas

Residential 20 Year
Commercial 5 Year Limited Warranty



To ensure correct colour, all floor samples are available on request at www.kahr flooring.com.
Please visit www.kahr flooring.com.com for detailed information about installation and maintenance.



TONGAS /TIVEDEN DRYBACK

SERVICES

At kahrsflooring.com you will find more information – and inspiration – about our floors, our company and the environment. The Kährs website is a helpful tool to you in your professional capacity. For additional information and consultation, please contact your local Kährs representative.


DOCUMENTS FOR DOWNLOADING

At kahrsflooring.com you will find a number of documents for downloading, containing facts about our different types of wood and vinyl flooring. These include technical data sheets, design guides, features, technical information, installation and maintenance guides.

ORDER SAMPLES

Kährs offers flooring samples to architects and designers free of charge. You can order a maximum of 3 samples at a time.

The delivery usually takes 3-5 working days after we have processed your order. Please note that your order may come in separate deliveries depending on where the products are stocked.

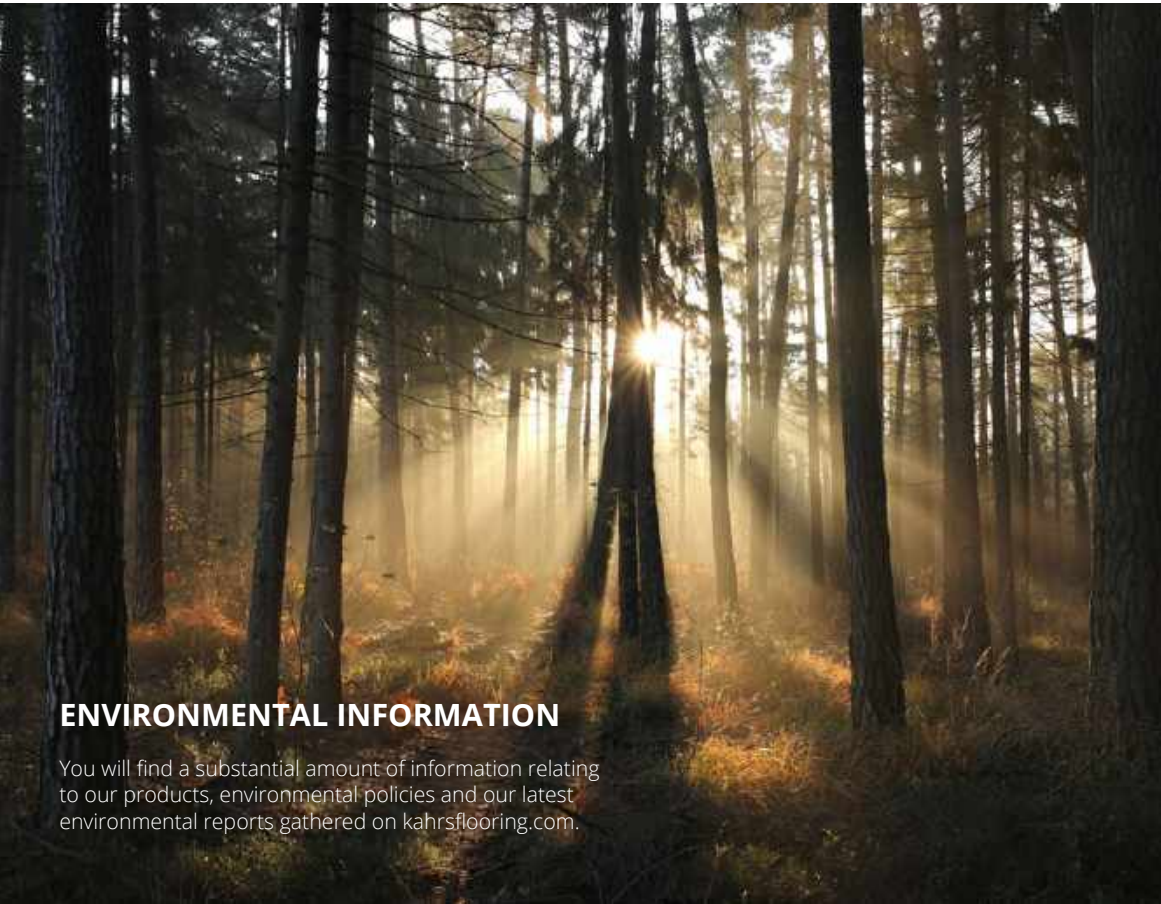

ENVIRONMENTAL INFORMATION

You will find a substantial amount of information relating to our products, environmental policies and our latest environmental reports gathered on kahrsflooring.com.



CAD TEXTURES

By offering CAD textures on our global assortment of hardwood we give you, as an architect and designer, the possibility to easily incorporate our products in your project planning, visualizing ideas and optimizing the result of the project.

At our website kahrsflooring.com you can search and filter our wide range of floors, and on each product page you can easily access and download our CAD textures.



SHOWROOMS AROUND THE WORLD

Our global network of showrooms provides the required infrastructure for commercial project processes around the world. They support architects and designers, while ensuring that our floors are professionally delivered and installed. Today, our showrooms can be found in design metropolises around the world, including Stockholm, London, Shanghai, Dubai, Moscow and Madrid.

KÄHRS

Kährs is a world-leading flooring manufacturer in hardwood and resilient flooring with a number of strong brands in its product portfolio, including Kährs, Karelia and Upofloor. The company is dedicated to providing the market with innovative new flooring solutions.

Kährs Group, which delivers products to more than 70 countries, is the market leader in Sweden, Finland, Norway and Russia and holds a strong position in other markets, such as the UK and Germany.

Colour reproduction within the brochure cannot be guaranteed, due to limitations in print technology. We, therefore, recommend that you visit your local Kährs dealers to ascertain a better representation of the products.





www.jular.pt

Sede e Fábrica:

Estrada Nacional 3, Km. 5,9
Vila Nova da Rainha
P-2050-522 Azambuja

Tel.: 263 850 070
Tlm.: 919 999 960

azambuja@jular.pt

Lisboa:

Rua das Oliveiras, 42 - Apt. 1042
Quinta de Santa Rosa
P-2681-901 Camarate

Tel.: 219 484 000
Tlm.: 919 999 666

mail@jular.pt

Norte:

Rua Oriental, 573
Apt. 5069
P-4456-901 Perafita

Tel.: 229 953 638
Tlm.: 919 550 654

porto@jular.pt

Centro:

Estrada da Atouguia
P-2495-651 Fátima

Tel.: 249 531 879
Tlm.: 916 896 001

fatima@jular.pt

Sul:

Urb. Serva, Bloco 1-A
Vale Paraíso
P-8200-567 Albufeira

Tel.: 289 588 538
Tlm.: 916 895 885

algarve@jular.pt



Kährs®

FLOORS BEYOND EXPECTATIONS

www.kahr flooring.com